

High shear capacity BOP


SHENKAI

Reference Standards: API 16A、GB/T 20174

Product applicable: It is appropriate to shear high performance, thick walled drill pipe and casing.

Product Features

- Using large cylinder or equipped tandem booster to enhance the shear force
- Can realize shearing high level drill pipe under pressure
- Reliable sealing performance, can shear multiple times;
- The shear blade can disassemble and change

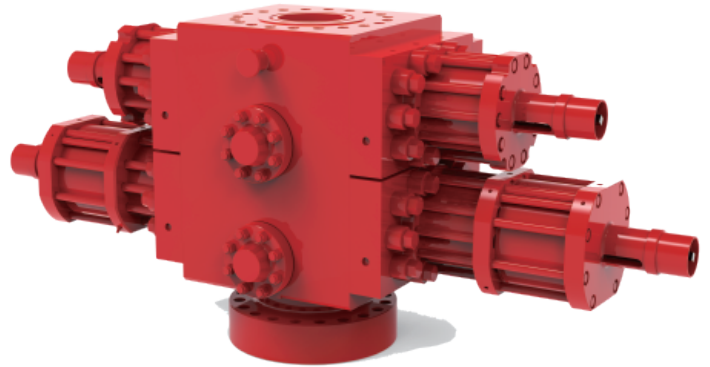

V-150

Max shear drill pipe level

25000psi

Max sealing pressure

177°C

Highest Temperature Class

Applicable Case: Southwest, Bohai, and South China Sea regions of China, Middle East, America

Technical Parameters

Bore Size	7 1/16"-26 3/4" (179.4mm-679.45mm)
Max Pressure	25000psi (175MPa)
Temperature Ratings for Metallic Materials	T-20/350
Temperature Ratings for Nonmetallic Sealing Materials	Highest BFF